



Uso Comercial | 150 Kg.




ESCALERAS CUPRUM

Escalera de tijera de aluminio

Serie C-2312

| Modelo | C-2312-03N | C-2312-04N | C-2312-05N | C-2312-06N | C-2312-07N |
|-----------------------------|------------|------------|------------|------------|------------|
| # Pies | 3 | 4 | 5 | 6 | 7 |
| # Peldaños | 2 | 3 | 4 | 5 | 6 |
| Altura total (m) | 0.91 | 1.22 | 1.53 | 1.83 | 2.13 |
| Altura Máx para pararse (m) | 0.28 | 0.58 | 0.86 | 1.14 | 1.45 |
| Alcance Máx de trabajo (m)* | 2.28 | 2.58 | 2.86 | 3.14 | 3.45 |
| Peso aprox. (kg) | 3.02 | 3.64 | 4.33 | 5.02 | 5.98 |
| Volumen aprox. (m³) | 0.06 | 0.08 | 0.11 | 0.14 | 0.17 |

*Se considera el alcance máximo de trabajo en la escalera de una persona que con su brazo extendido alcanza 2 m.

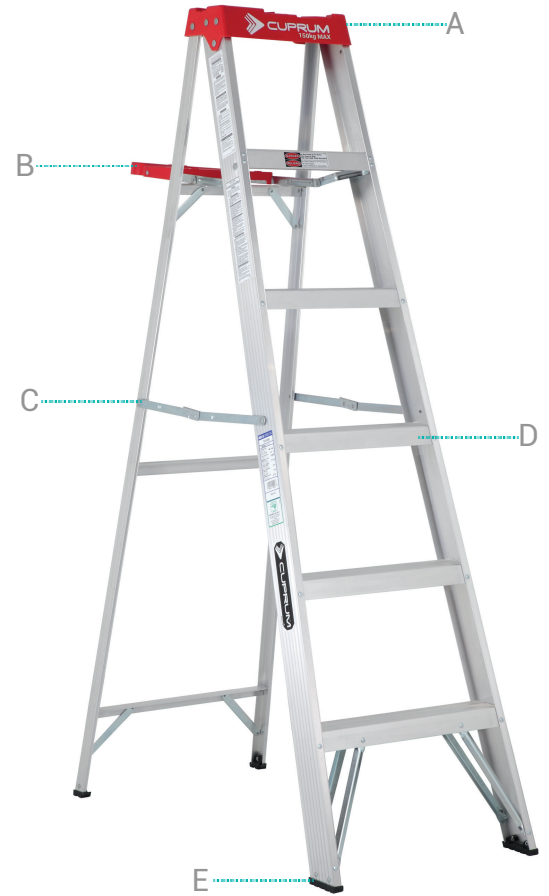


Tapa ProTop® con ranuras para herramientas

Charola multifunciones

Tirantes antipellizcos

Peldaños con superficie anti-derrapante

Tacones con goma para prevenir derrapes y rayones



ANSI
Tipo III



EscalerasCuprum