


| | |
|------------------------|---|
| article# | 045-6 |
| article description | CEE-plug 125A 5p 6h IP67 POWER TWIST |
| description long | CEE-plug 125A 5p 6h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~/50+60Hz contacts: brass nickel plated, with pilot pin connection technology: frame terminals with screws IP protection class: IP66/IP67 |
| GTIN (EAN) | 9003399020582 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 1.169 kg |
| packaging quantity | 2 |
| minimum order quantity | 2 |

| | |
|---------------------------------|----------------------|
| ETIM 9.0 | EC000140 |
| IEC-amperage | 125 A |
| Number of poles | 5 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position | 6 h |
| Identification colour | Red |
| RAL-number | 7046 |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Angle of plug | Straight |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

| | |
|------------------------|-----------------------|
| a | 270 mm |
| b | 131 mm |
| K (cable Ø) | 22,5-50 mm |
| SW | 81 mm |
| wire flexible | 16-50 mm ² |
| contact screws | 450 Ncm |
| connecting screws | 200 Ncm |
| strain relief | 1500 Ncm |
| dismantling length | 100 mm |
| stripping length | 24-27 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |



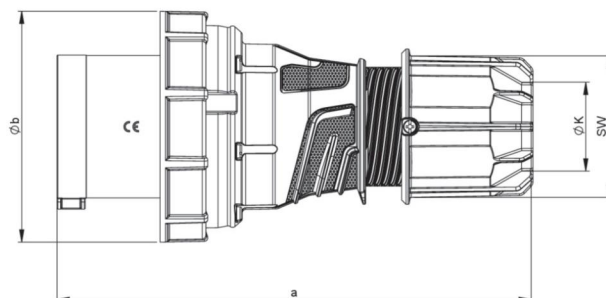



<https://www.pcelectric.at/shop/en/?func=detail&artnr=045-6>

